



## Firmware version upgrade

---


**操作步驟**

**User Guide**


By Allen, January 17,2022

[www.gainscha.com.tw](http://www.gainscha.com.tw)


1. The printer connects to the computer through the USB interface.
2. Open the printer.
3. Open the software FirmwareTool

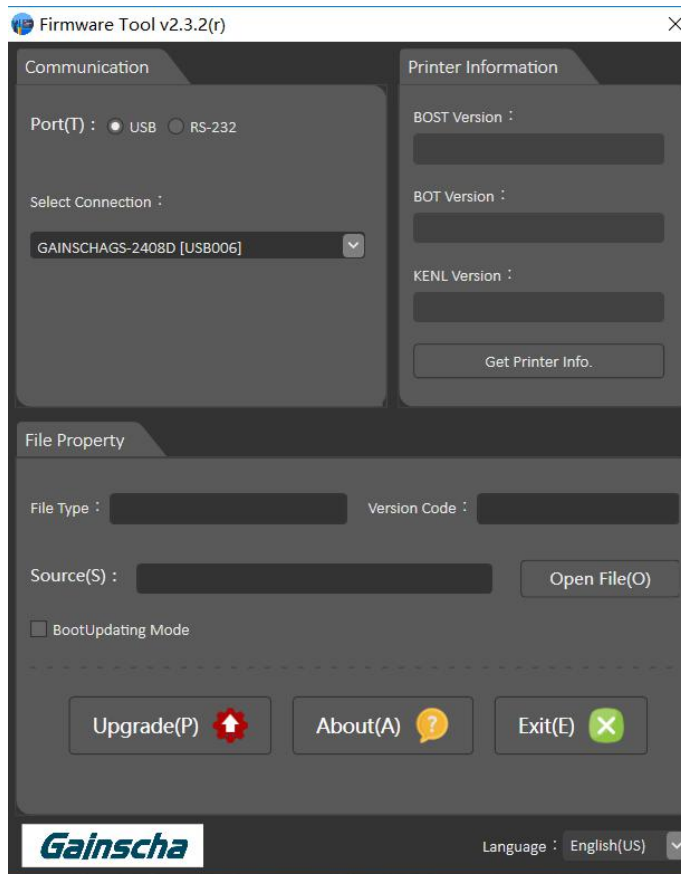

4. Check if the printer is connected to the computer and software as shown below: (Model GS-2408D)

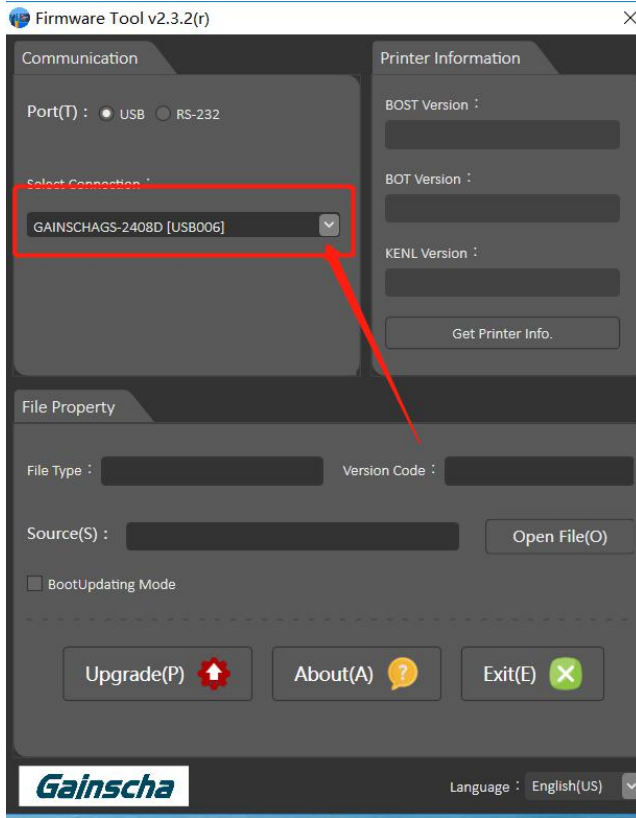

## 5. Click on Open, File (O)

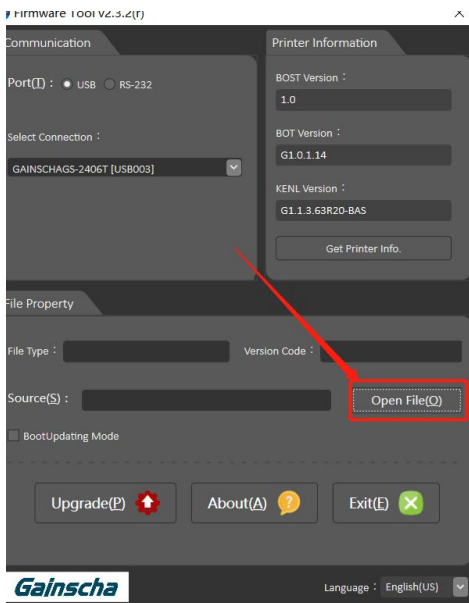


## 6. Find the corresponding model and version model of


the printer.

名称	修改日期	类型	大小
GS-2206T_G1.1.3.63R20-BAS	2021/10/1 13:30	GDAC 文件	2,092 KB
GS-2208D_G1.1.3.63R20-BAS	2021/10/1 13:31	GDAC 文件	2,094 KB
GS-2406T_G1.1.3.63R20-BAS_211012	2021/10/12 10:19	GDAC 文件	2,100 KB
GS-2406T_PLUS_Std_G1.1.3.63R20-B...	2021/10/1 13:28	GDAC 文件	2,101 KB
GS-2408D_G1.1.3.63R20-BAS	2021/9/16 15:32	GDAC 文件	2,104 KB
GS-3405T_G1.1.3.63R20-BAS_211012	2021/10/12 10:20	GDAC 文件	2,099 KB
GS-3405T_PLUS_Std_G1.1.3.63R20-B...	2021/10/1 13:33	GDAC 文件	2,099 KB

## 7. Click on Upgrade (P).

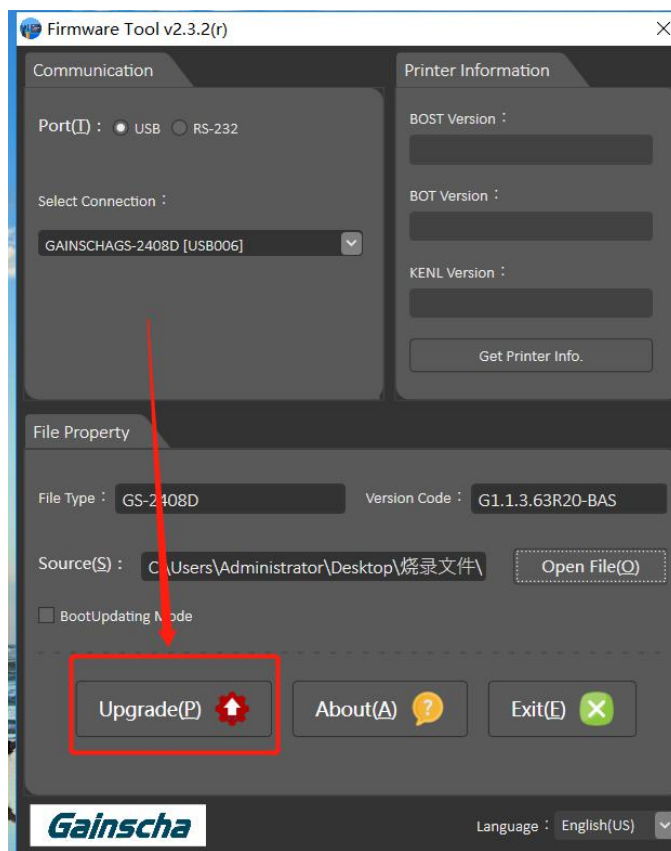


8. The window will pop up and click on Update to upgrade the printer program.

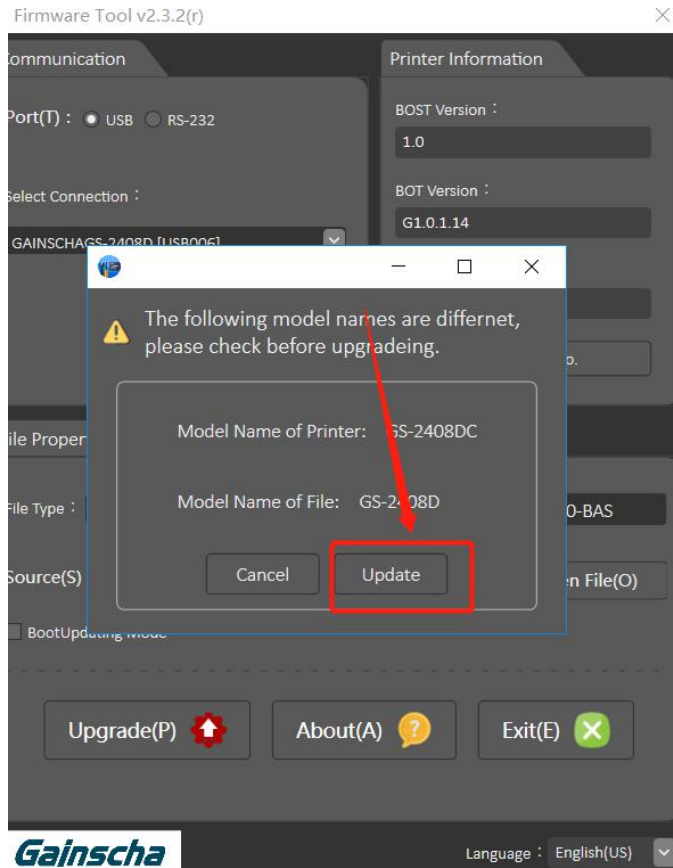


**Note: 1. It is normal for the printer indicators to flash continuously during the upgrade process.**

**2. After the upgrade is completed, the printer will sound dripping. The above situation indicates that the printer program has been completed the upgrade.**

9. After the upgrade, a window pop up and click OK.

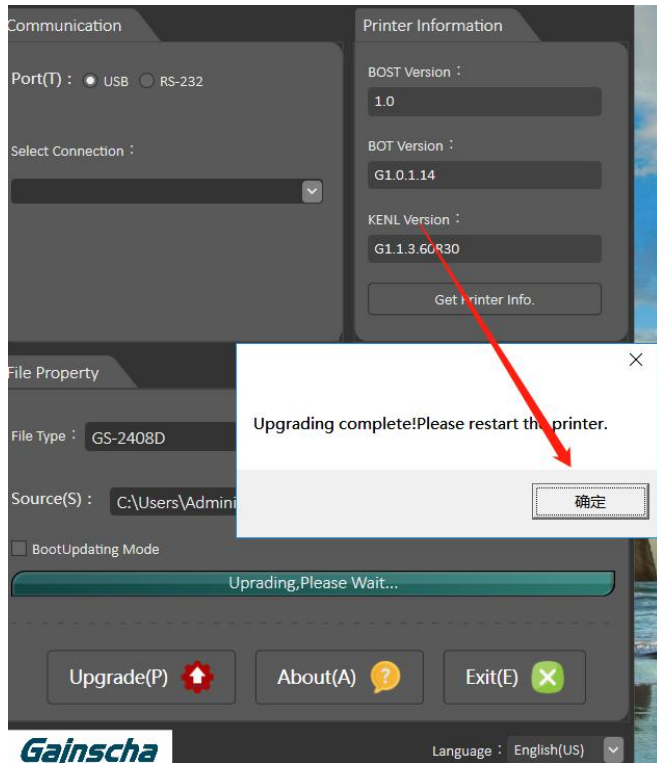

10. Click on the Get Printer Info. Get the current program version of the printer. as illustrated in following figure:

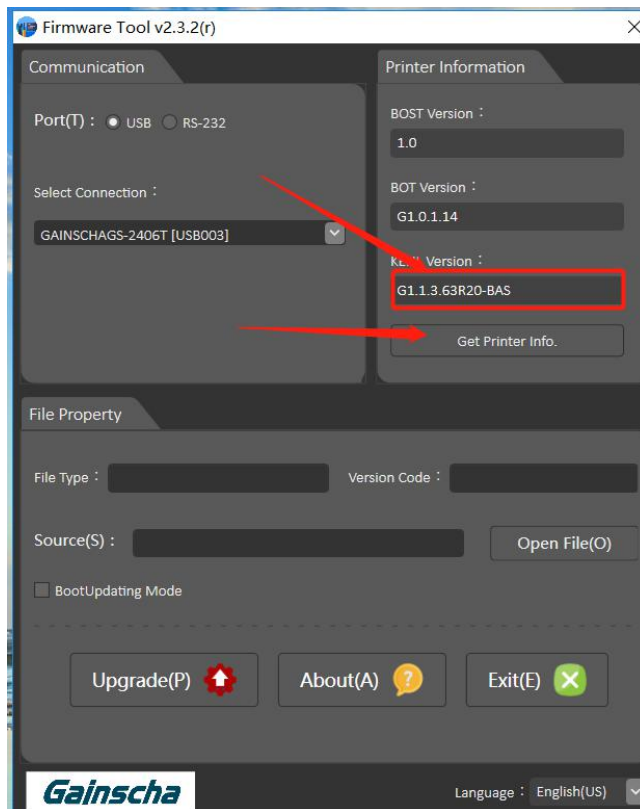

**Note: See Figure 4 to see if the printer program version at the picture frame is consistent with the previous version.**

**11. Completed the printer program upgrade.**